



安装外形图 Overall dimension

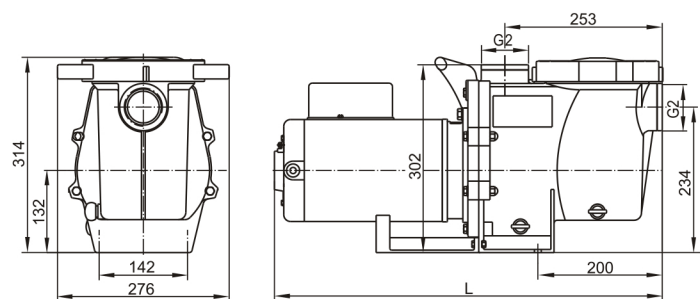

型号 Model	L
56SWP100-I	624
56SWP150-I	
56SWP200-I	
56SWP300-I	
56SWP400-I	644
56SWP500-I	
56SWP200-II	
56SWP300-II	
56SWP400-II	624
56SWP500-II	



泳池循环过滤
Recirculation of water in swimming pool equipment

特点

- * 此系列产品是我司参考市场上使用的习惯尺寸后，完全独立开发的；
- * 进出水口用不锈钢口环加固；
- * 一体式提手，安装便捷。

Features

- * This series product is us completely independent development, the overall size is reference to the market habit.
- * Inlet and outlet be reinforce by a stainless steel ring;
- * Integral structure handle, convenient installation.



工作条件

介质温度：5-50℃
环境温度：≤50℃
最大工作压力：0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max.working pressure: 0.3MPa

性能曲线 Performance curves

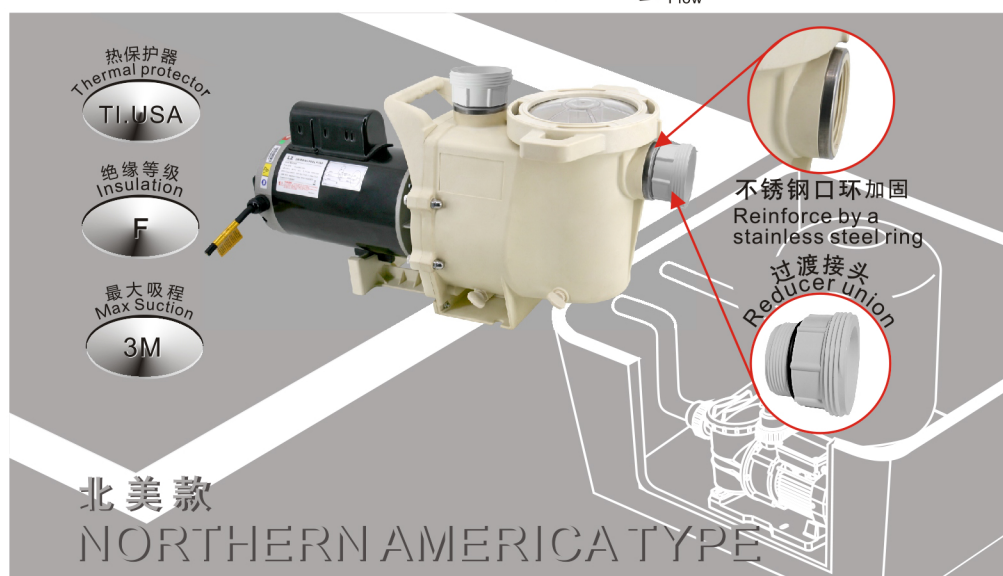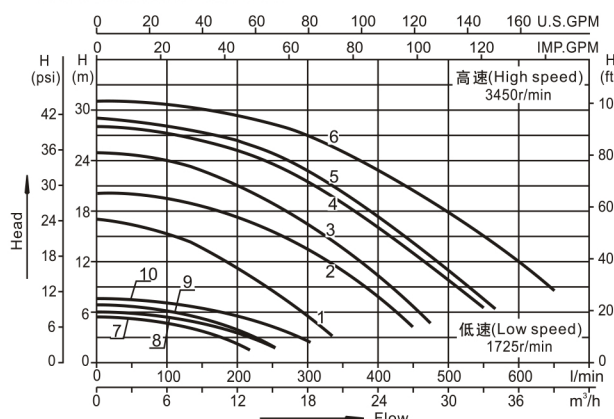

北美款
NORTHERN AMERICA TYPE

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 (curves)	电压 V	频率 Hz	功率 Power(P1)		接头尺寸 Fitting size (mm)	电流 (Amps)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
						kW	HP				
56SWP100-I	350	17	1	220-240	60	0.75	1.0	60or60.3	4	20	685×280×365
56SWP150-I	430	21	2	115/208-230	60	1.1	1.5	60or60.3	13.2/6.2-6.6	21	685×280×365
56SWP150-I	430	21	2	220-240	60	1.1	1.5	60or60.3	6.6	21	685×280×365
56SWP200-I	480	25	3	115/208-230	60	1.5	2.0	60or60.3	16/7.8-8	22	685×280×365
56SWP200-I	480	25	3	220-240	60	1.5	2.0	60or60.3	8	22	685×280×365
56SWP300-I	550	28	4	220-240	60	2.2	3.0	60or60.3	10	24.2	685×280×365
56SWP400-I	570	29	5	220-240	60	3.0	4.0	60or60.3	12	24.2	685×280×365
56SWP500-I	650	31	6	220-240	60	3.75	5.0	60or60.3	15	27.6	685×280×365
56SWP200-II	480	25	3/7	220-240	60	0.37/1.5	0.5/2.0	60or60.3	3/8	22.5	685×280×365
56SWP300-II	550	28	4/8	220-240	60	0.55/2.2	0.75/3.0	60or60.3	3.5/10	24.5	685×280×365
56SWP400-II	570	29	5/9	220-240	60	0.55/3.0	0.75/4.0	60or60.3	4.4/12	24.5	685×280×365
56SWP500-II	650	31	6/10	220-240	60	0.75/3.75	1.0/5.0	60or60.3	5.0/15	28	685×280×365

