


安装外形图 Overall dimension

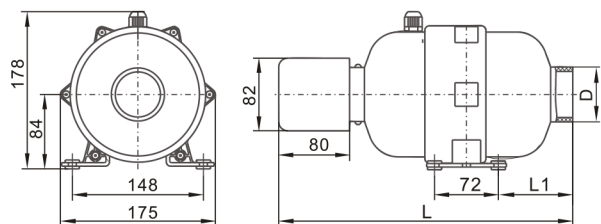

型号 Model	外形尺寸 Shape size (mm)			
	L	L1	直伸出风口 smooth outlet	螺纹出口 threaded Outlet
APW400/700/900-V1-G	254	84	φ 62	1½ FBT
APW400/700/900-V2-G	274	104	φ 62	1½ FBT
APW400/700/900-V1	332	84	φ 62	1½ FBT
APW400/700/900-V2	352	104	φ 62	1½ FBT

注:

图中D为螺纹连接方式时,可配 φ 32、φ 33.5、φ 48.5 及 φ 50接头。

图中D为直伸连接方式时,可配 φ 48.5连接管

D in fig.is thread connection that union of φ 32, φ 33.5, φ 48.5 and φ 50

is available

D in fig.is direct connection that only φ 48.5 available.



EN55014-1:2006




EN55014-2:1997+A1+2001

EN61000-3-2:2006

EN61000-3-3:1995+A1+A2:2005



2004-UL1563

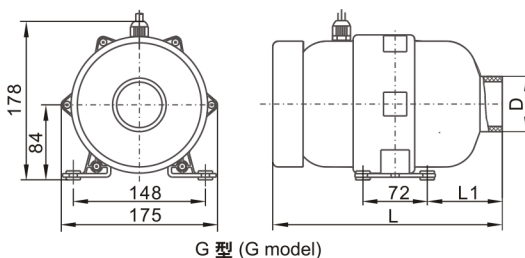

型号 Model	L
APW300-V1	220
APW300-V2	248



技术参数列表 Technical parameter list

型号 Model	输入功率 Power W	发热器功率 Heater Power W	电流 (Amps)		最大风压 Max Pressure (Mpa)	最大风量 Air volume (m³/min)	风泵噪音 Noise Level dB(A)	可配气嘴数 Jets Qty (pc)	建议使用水深 Recommended water depth (m)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
			110-120V	220-240V							
APW300-1	300	180	3.0	-	0.011	1.65	<68	8-16	0.4	1.8	250×155×175
APW400-1	400	180	5.3	-	0.013	3.4	<81	12-24	0.6	3.2	380×195×210
APW700-1	700	180	8.0	-	0.18	4.2	<82	16-32	0.8	3.2	380×195×210
APW900-1	900	180	9.8	-	0.024	5	<84	20-40	1.0	3.2	380×195×210
APW300-2	300	180	-	1.7	0.011	1.65	<68	8-16	0.4	1.8	250×155×175
APW400-2	400	180	-	2.6	0.013	3.4	<60	12-24	0.6	3.2	380×195×210
APW700-2	700	180	-	4.0	0.018	4.2	<82	16-32	0.8	3.2	380×195×210
APW900-2	900	180	-	5.0	0.024	5	<84	20-40	1.0	3.2	380×195×210
APW400-1-G	400	180	5.3	-	0.013	3.4	<80	12-24	0.6	3.2	300×195×210
APW700-1-G	700	180	8.0	-	0.018	4.2	<82	16-32	0.8	3.2	300×195×210
APW900-1-G	900	180	9.8	-	0.024	5	<84	20-40	1.0	3.2	300×195×210
APW400-2-G	400	180	-	2.6	0.013	3.4	<80	12-24	0.6	3.2	300×195×210
APW700-2-G	700	180	-	4.0	0.018	4.2	<82	16-32	0.8	3.2	300×195×210
APW900-2-G	900	180	-	5.0	0.024	5	<84	20-40	1.0	3.2	300×195×210



浴缸水循环

Recirculation of water in Bathtub pump



SPA池水循环

Recirculation of water in SPA equipment

工作条件

输送介质: 干燥空气

环境温度: ≤40℃


最大工作压力: 0.1MPa

Working conditions

Transmission Medium: Dry air

Environmental temperature: ≤40℃

Max.working pressure: 0.1MPa

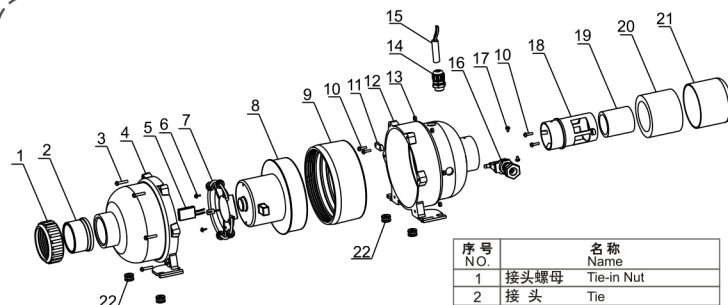

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	十字盘头螺钉 Cross recessed pan head tapping screws
4	上壳 Upper part of housing
5	热保护器 Thermal protector
6	十字槽盘头自攻螺钉 Cross recessed pan head tapping screws

序号 NO.	名称 Name
7	加热器 Heater
8	电机 Motor
9	单级防震胶垫 Shock absorber
10	十字槽盘头自攻螺钉 Cross recessed pan head tapping screws
11	电缆压板 Cable Gland
12	下壳 Bottom part of housing
13	六角螺母 Hexagonal Nut
14	电缆封头 Cable head
15	电缆 Cable
16	空气开关组件 Switch assem
17	十字槽盘头自攻螺钉 Cross recessed pan head tapping screws
18	进气管 Intake-tube
19	海绵垫I Sponge cushion
20	海绵垫II Sponge cushion
21	气盖 Air cover
22	防震脚垫 Silent block